




## COPPER CONNECTOR AS PER AUSTRALIAN STANDARD

MATERIAL: EC GRADE COPPER  
SURFACE: TIN PLATED

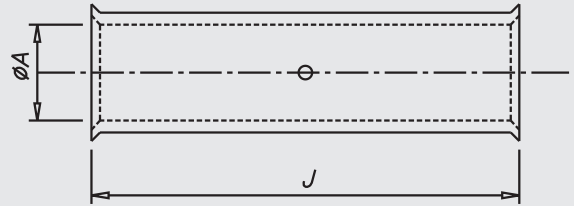

Size mm <sup>2</sup>	A	J	MG CAT NO.	Crimping Tools Code
2.5	2.5	22.2	MGAHC-2.5	MG-10
4	3.3	22.2	MGAHC-4	MG-10
6	3.7	22.2	MGAHC-6	MG-10
10	4.7	22.2	MGAHC-10	MG-50BS
16	5.5	44.4	MGAHC-16	MG-50BS
25	7.1	47.6	MGAHC-25	MG-50BS
35	8.4	47.6	MGAHC-35	MG-50BS
50	9.5	47.6	MGAHC-50	MG-120
70	11	50.8	MGAHC-70	MG-120
95	13.4	54	MGAHC-95	MG-120
120	15.5	65.1	MGAHC-120	MG-300H
150	16.3	65.1	MGAHC-150	MG-300H
185	18.4	65.1	MGAHC-185	MG-300H
240	21.2	88.9	MGAHC-240	MG-300H
300	23.8	88.9	MGAHC-300	MG-300H
400	26.8	88.9	MGAHC-400	MG-1000
500	30	114.3	MGAHC-500	MG-1000
630	33.5	114.3	MGAHC-630	MG-1000

Bell mouth lug starts from 10 mm<sup>2</sup> to 300 mm<sup>2</sup>

\*All dimensions in mm

**WE CONNECT ENERGY**

[www.mgelectrica.com](http://www.mgelectrica.com)

F-41, MIDC Area, Satpur, Nasik-7, Maharashtra, India. Telfax: +91 253 2350961, 2350163 [lugs@mgelectrica.com](mailto:lugs@mgelectrica.com)

**For details about our other products and specifications please refer the corporate website**

Disclaimer: M.G reserve the right product without prior, as part of its continual improvement programme. Whilst every effort is taken to ensure the accuracy of information contained in the sheet, M.G accepts no liability for matters arising as result of errors or omissions.