




COPPER PIN INSULATED WITH METAL REINFORCEMENT TERMINAL

MATERIAL ETP COPPER IS : 1897:1983
SURFACE: TIN PLATED

1.5 sq. mm. **RED**
2.5 sq. mm. **BLUE**
4-6 sq. mm. **YELLOW**

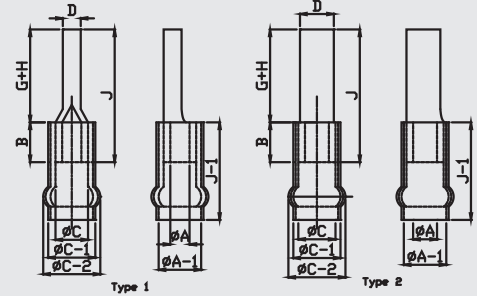

Size mm ²	A	C	D	F	B	G+H	J	C-1	A-1	C-2	MG CAT NO.	Type	Crimping Tools Code
1.5	1.6	3.2	1.9	0.8	5	10	17	4.8	3.6	5.4	MGPR-26	I	MG-10I
1.5	1.6	3.2	3.1	0.8	5	10	17	4.8	3.6	5.4	MGPR-40	II	MG-10I
2.5	2.3	3.9	1.9	0.8	5	10	17	5.5	4.4	6	MGPR-27	I	MG-10I
2.5	2.3	3.9	1.9	0.8	5	17	24	5.5	4.4	6	MGPR-27/A	I	MG-10I
2.5	2.3	3.9	3.1	0.8	5	10	17	5.5	4.4	6	MGPR-28	II	MG-10I
4	2.9	4.9	2.7	1	6	10	20	7.1	6.4	8.6	MGPR-29	I	MG-10I
4	3.6	5.6	5.1	1	6	10	20	7.1	6.4	8.6	MGPR-30	I	MG-10I
6	3.6	5.6	2.7	1	6	10	20	7.1	6.4	8.6	MGPR-31	I	MG-10I
6	4	6	2.7	1	6	10	20	7.9/7.2	6.4	8.6	MGPR-32	I	MG-10I

*All dimensions in mm

WE CONNECT ENERGY

www.mgelectrica.com

F-41, MIDC Area, Satpur, Nasik-7, Maharashtra, India. Telfax: +91 253 2350961, 2350163 lugs@mgelectrica.com

For details about our other products and specifications please refer the corporate website

Disclaimer: M.G reserve the right product without prior, as part of its continual improvement programme. Whilst every effort is taken to ensure the accuracy of information contained in the sheet, M.G accepts no liability for matters arising as result of errors or omissions.