


Copper Four Hole Transformer Terminal End (MGFT Series)

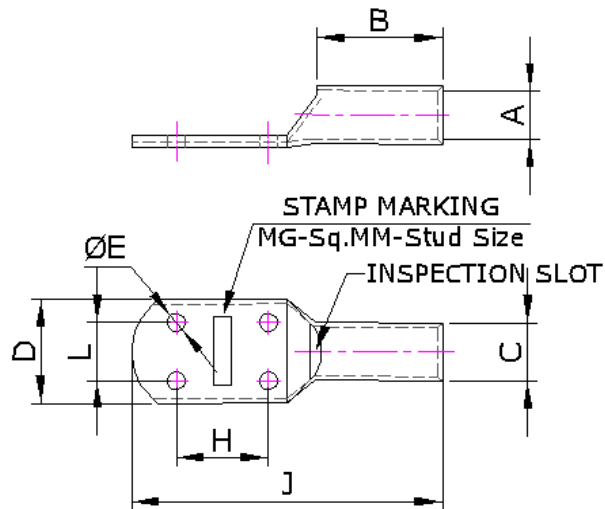

Technical Specification

Material: Copper BS 1977:1976 & IS 1897

Surface: Tin-plated to protect against corrosion

Minimum operating temperature: -50 °C

Maximum operating temperature: 150 °C

Reference standard: BS Standards

Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done.

Copper Four Hole Transformer Terminal End (MGFT Series)


- Flat contact surface to avoid hotspot.

COPPER FOUR HOLE TERMINAL END

MATERIAL : COPPER BS 1977:1976 & IS

191:2007

SURFACE: TIN PLATED



Size mm ²	E	A	C	D	B	L	H	J	MG CAT NO.	Crim- ping Tools Code
300	8.5	23.5	30	56	42	35	25	101	MGFT-300-8	MG-1000
300	10.5	23.5	30	56	42	35	25	101	MGFT-300-10	MG-1000
400	8.5	28.5	36.5	56	44	35	25	114	MGFT-400-8	MG-1000
400	10.5	28.5	36.5	56	44	35	25	114	MGFT-400-10	MG-1000
500	8.5	30	39	56	48	35	25	124	MGFT-500-8	MG-1000
500	10.5	30	39	56	48	35	25	124	MGFT-500-10	MG-1000
630	8.5	35	45	65	56	35	25	144	MGFT-630-8	MG-1000
630	10.5	35	45	65	56	35	25	144	MGFT-630-10	MG-1000

*All dimensions are in
mm