


Aluminum Long Palm Double Stud Tubular Terminal End

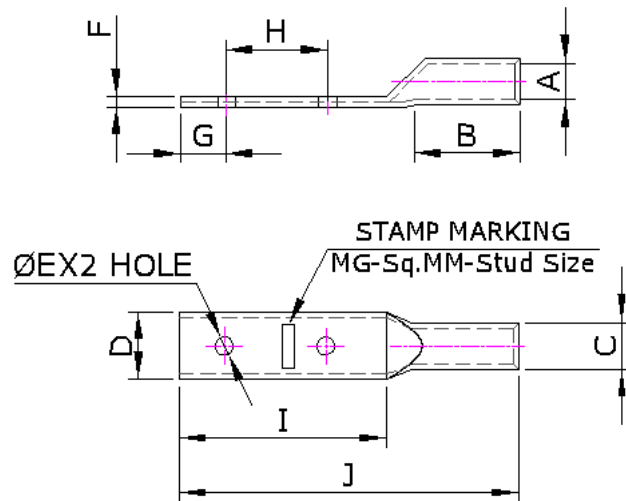

Technical Specification

Material: Aluminium IS 5082

Surface: Tin-plated to protect against corrosion

Minimum operating temperature: -50 °C

Maximum operating temperature: 150 °C

Reference standard: Indian Standards

Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is

Aluminum Long Palm Double Stud Tubular Terminal End


done.

- Flat contact surface to avoid hotspot.

ALUMINUM LONG PALM DOUBLE STUD TUBULAR TERMINAL END

MATERIAL : ALUMINIUM IS : 5082 : 1998

SURFACE : NATURAL



Size mm ²	E	A	C	D	F	B	G	H	I	J	MG CAT NO.	Crim- ping Tools Code
25	8.2	7	9.7	13.7	2.7	21	11	20	42	70	MGALPD-25	MG-50BS
35	8.2	8	10.8	15.4	2.8	21	11	20	42	70	MGALPD-35	MG-50BS
50	10.3	9.3	13	20	3.5	30	13	40	65	115	MGALPD-50	MG-120H
70	10.3	11.6	16	24	4.4	30	13	40	65	115	MGALPD-70	MG-120H
95	10.3	12.9	17.1	25	4.2	30	13	40	65	115	MGALPD-95	MG-120H
120	13	15	19.6	28	4.6	50	20	40	81	145	MGALPD-120	MG-120H
150	13	16.5	21.5	31	5.3	50	20	40	90	156	MGALPD-150	MG-300H
185	13	18.5	24	34	6	50	20	40	90	156	MGALPD-185	MG-300H
240	13	21	27	39	6	50	20	40	90	156	MGALPD-240	MG-300H
300	13	24	31	44	6.8	50	20	40	90	156	MGALPD-300	MG-300H

*All dimensions are
in mm

Aluminum Long Palm Double Stud Tubular Terminal End