


Copper Tubular In-Line Connector Insulated (MGICI Series)

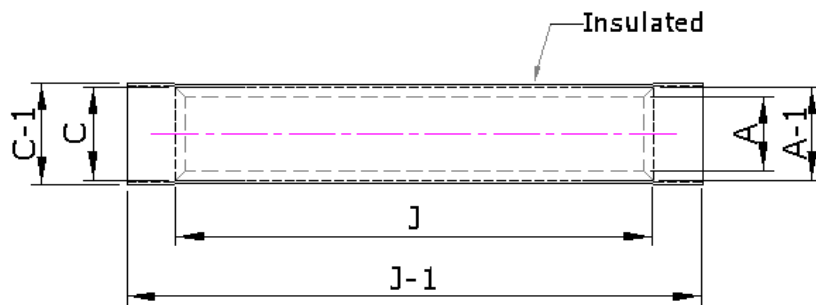

Technical Specification

Material: Copper BS 1977:1976 & IS 1897

Surface: Tin-plated to protect against corrosion

Minimum operating temperature: -20 °C

Maximum operating temperature: 115 °C

Reference standard: Indian Standards

Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is

Copper Tubular In-Line Connector Insulated (MGICI Series)

done.

- Flat contact surface to avoid hotspot.

COPPER TUBULAR IN-LINE CONNECTOR INSULATED

MATERIAL : COPPER BS 1977:1976 & IS


191:2007

SURFACE: TIN PLATED

1.5 Sq.mm. **RED**

2.5 Sq.mm. **BLUE**

4-6 Sq.mm. **YELLOW**

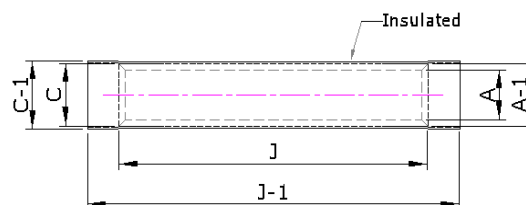

Size mm ²	A	C	J	A-1	C-1	J-1	MG CAT NO.	Crim- ping Tools Code
1.5	1.6	3.2	15	3.3	4.9	25	MGICI-463	MG-10I
2.5	2.4	4	15	4.1	5.5	25	MGICI-464	MG-10I
4-6	3.5	5.5	15	5.6	7.2	27	MGICI-465	MG-10I

*All dimensions are in
mm