


Copper Fork type non-Insulated terminal (MGF Series)

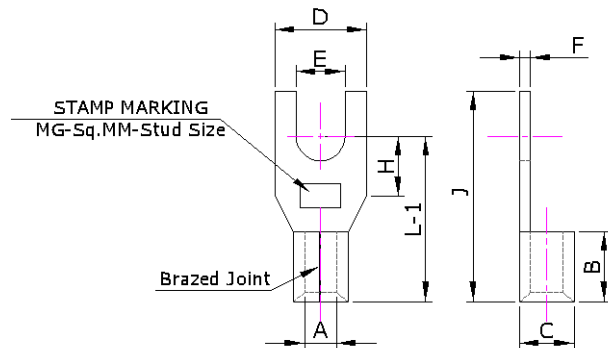

Technical Specification

Material: ETP Copper IS 1897:1983

Surface: Tin-plated to protect against corrosion

Minimum operating temperature: -50 °C

Maximum operating temperature: 150 °C

Reference standard: Indian Standards

Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is

Copper Fork type non-Insulated terminal (MGF Series)


done.

- Flat contact surface to avoid hotspot.

COPPER FORK TYPE TERMINAL

MATERIAL ETP COPPER IS : 1897:2008

SURFACE: TIN PLATED

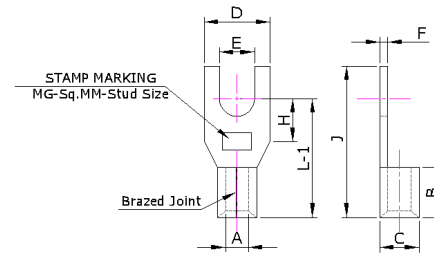

Size mm2	E	A	C	D	F	B	H	L-1	J	MG CAT NO.	Crim- ping Tools Code
0.5	3.4	1.1	2.7	6.5	0.8	5	3.6	11.1	15	MGF-0.5	MG-10
0.75	3.5	1.3	2.9	6.5	0.8	5	3.6	11.1	15	MGF-0.75	MG-10
1	3.4	1.3	2.9	5.8	0.8	5	3.3	10.8	15	MGF-1	MG-10
1.5	3.5	1.6	3.2	6.8	0.8	5	4.8	11.1	15	MGF-7249	MG-10
1.5	3	1.8	3.4	6.4	0.8	5	3.1	10.5	13	MGF-7250	MG-10
2.5	3.5	2.3	3.9	6.5	0.8	5	4.3	11.8	15	MGF-7251	MG-10
2.5	5	2.6	4.6	10.6	1	6.2	4.3	12.4	21	MGF-7280	MG-10
2.5	4.2	2.3	3.9	8	0.8	5	5	13.1	17.5	MGF-925	MG-10
4-6	3.1	3.5	5.5	6	1	6	4.1	11.5	15	MGF-7252	MG-10
4-6	3.5	3.5	5.5	6	1	6	3.2	11	15	MGF-7253	MG-10

Copper Fork type non-Insulated terminal (MGF Series)

Size mm ²	E	A	C	D	F	B	H	L-1	J	MG CAT NO.	Crim- ping Tools Code
10	6.5	4.5	6.9	16	1.2	8	7	19	27	MGF-7254	MG-10
10	8.2	4.5	6.9	16	1.2	8	7	19	27	MGF-7255	MG-10
10	5.4	4.5	6.5	10	1	8	12.2	22.7	31	MGF-10	MG-10
16	5.4	5.6	8	10	1.2	10	11	25	33	MGF-16	MG- 50SC