


Fork Hook Type Non-Insulated Lug (MGFH Series)

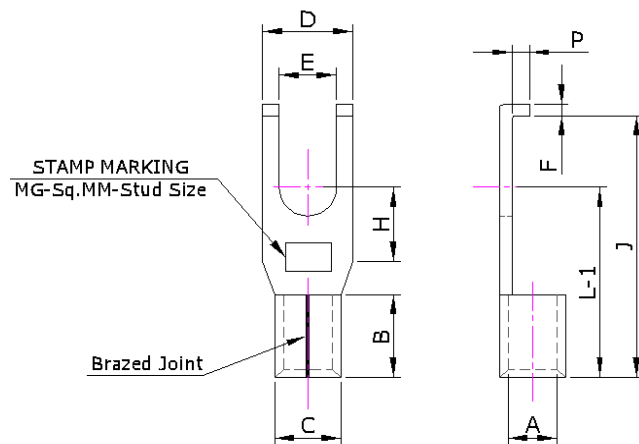

Technical Specification

Material: ETP Copper IS 1897:1983

Surface: Tin-plated to protect against corrosion

Minimum operating temperature: -50 °C

Maximum operating temperature: 150 °C

Reference standard: Indian Standards

Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done.


Fork Hook Type Non-Insulated Lug (MGFH Series)

- Flat contact surface to avoid hotspot.

COPPER FORK HOOK TYPE TERMINAL

MATERIAL ETP COPPER IS : 1897:2008

SURFACE: TIN PLATED

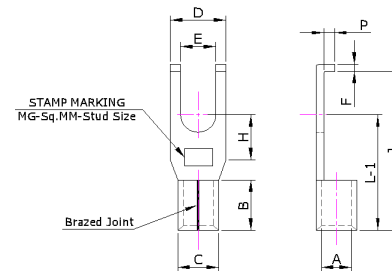

Size mm2	E	A	C	D	F	B	H	L-1	J	P	MG CAT NO.	Crimping Tools Code
1.5	2.3	1.6	3.2	6	0.8	5	5.2	10.2	13	1	MGFH-7278	MG-10
1.5	2.3	1.6	3.2	4.6	0.8	5	5.2	10.2	13	1	MGFH-7265	MG-10
1.5	4.1	1.6	3.2	7.5	0.8	5	6.5	11.5	15	2.4	MGFH-7266	MG-10
1.5	3.6	1.6	3.2	6.8	0.8	5	3	10	15	1.6	MGFH-7256	MG-10
1.5	5.1	1.6	3.2	8	0.8	5	5	12	18	1.6	MGFH-7257	MG-10
1.5	6.3	1.6	3.2	12	0.8	5	5	13	19	1.6	MGFH-7270	MG-10
1.5	8.1	1.6	3.2	12	0.8	5	5	13	19	1.6	MGFH-7271	MG-10
2.5	3.6	2.3	3.9	6.5	0.8	5	3	10	15	1.6	MGFH-7258	MG-10
2.5	4.1	2.3	3.9	7.7	0.8	5	3	10	16	1.6	MGFH-7259	MG-10
2.5	6.3	2.3	3.9	12	0.8	5	5	13	19	1.6	MGFH-7272	MG-10

Fork Hook Type Non-Insulated Lug (MGFH Series)

Size mm ²	E	A	C	D	F	B	H	L-1	J	P	MG CAT NO.	Crim- ping Tools Code
2.5	8.1	2.3	3.9	12	0.8	5	5	13	19	1.6	MGFH-7273	MG-10
4	4.1	3.1	5.5	10	1.2	6	5	14	20	2	MGFH-7274	MG-10
4	5.1	3.1	5.5	10	1.2	6	5	14	20	2	MGFH-7275	MG-10
4	6.3	3.1	5.5	12	1.2	6	5	14	20	2	MGFH-7276	MG-10
4	8.1	3.1	5.5	12	1.2	6	5	14	20	2	MGFH-7277	MG-10
4-6	4.1	3.5	5.5	10	1	6	3	12	18	2	MGFH-7261	MG-10
4-6	5.1	3.5	5.5	10	1	6	5	14	20	2	MGFH-7262	MG-10
4-6	5.1	3.5	5.5	12	1	6	5	14	20	2	MGFH-7263	MG-10
4-6	4.1	3.5	5.5	8	1	6	5	13	17	2	MGFH-7268	MG-10
4-6	5.1	3.5	5.5	8	1	6	5	13	17	2	MGFH-7269	MG-10