


Snap - On Female Plain with Dimple

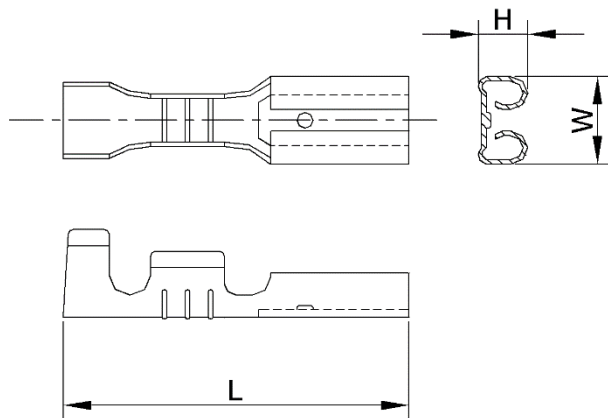

Technical Specification

Material: Brass

Surface: Nickel-plated to protect against corrosion

Minimum operating temperature: -20 °C

Maximum operating temperature: 80 °C

Reference standard: Indian Standards

Features


- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is

Snap - On Female Plain with Dimple

done.

- Flat contact surface to avoid hotspot.

SNAP-ON FEMALE PLAIN WITH DIMPLE

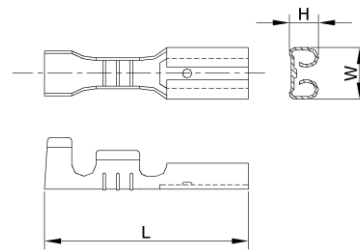

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLICABLE MATING TERMINAL	MATERIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1963	6.3 × 0.8	0.5 -1.25	6.3 × 0.80 FEMALE	18.70	2.98	7.50	1969	BRASS	6,000
MG-1696	2.8 × 0.5	0.5 -1.0	2.8 × 0.50 FEMALE	15.00	1.95	3.90	1829	BRASS	10,000
MG-1698	2.8 × 0.8	0.5 - 1.0	2.8 × 0.80 FEMALE	15.00	1.95	2.10	1929	BRASS	10,000