


Snap - On female Plain for Connector Locking

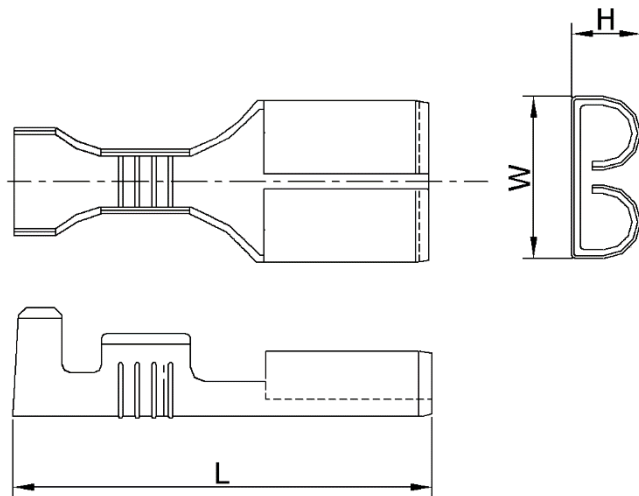

Technical Specification

Material: Brass

Surface: Nickel-plated to protect against corrosion

Minimum operating temperature: -20 °C

Maximum operating temperature: 80 °C

Reference standard: Indian Standards

Features


- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the

Snap - On female Plain for Connector Locking

conductor has been fully inserted before crimping is done.

- Flat contact surface to avoid hotspot.

SNAP - ON FEMALE PLAIN FOR CONNECTOR LOCKING

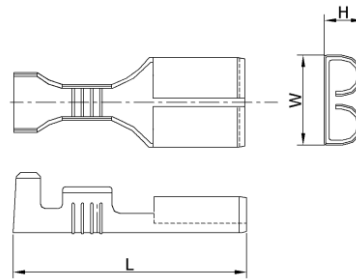

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1967	6.3 × 0.8	0.5 - 1.25	6.3 × 0.80 FEMALE	18.90	2.98	7.50	1810	BRASS	6,000
MG-1980	6.3 × 0.8	0.75 - 1.5	6.3 × 0.80 FEMALE	18.90	2.98	7.50	1810	BRASS	6,000
MG-1909	6.3 × 0.8	0.5 - 0.85	6.3 × 0.80 FEMALE	18.90	2.98	7.50	1810	BRASS	6,000
MG-1891	2.3 × 0.5	0.5 - 1.0	2.3 × 0.65 FEMALE	16.00	2.5	2.90	1478	BRASS	4,000
MG-1012	6.3 × 0.8	1.5 - 3.0	6.3 × 0.80 FEMALE	18.90	2.95	7.50	1810	BRASS	5,000

Snap - On female Plain for Connector Locking

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1648	4.8 × 0.8	0.5 - 1.0	4.8 × 0.80 FEMALE	15.80	2.65	6.00	NA	BRASS	8,000
MG-2967	6.3 × 0.8	0.5 - 1.25	6.3 × 0.80 FEMALE	18.90	2.98	7.50	1810	PHOS.BRO	6,000

*All dimensions are in mm

81