


Snap - On Female with Windows & Dimple

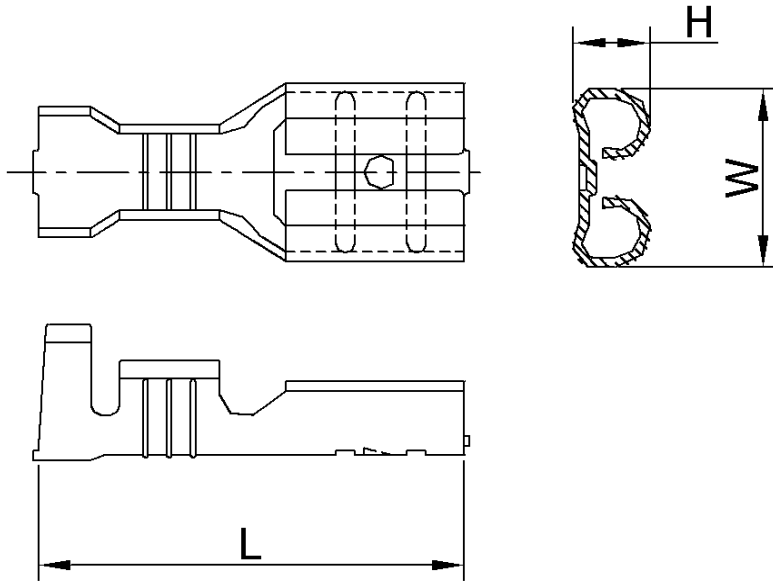

Technical Specification

Material: Brass

Surface: Nickel-plated to protect against corrosion

Minimum operating temperature: -20 °C

Maximum operating temperature: 80 °C

Reference standard: Indian Standards


Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done.

Snap - On Female with Windows & Dimple

-
- Flat contact surface to avoid hotspot.

SNAP - ON FEMALE WITH WINDOWS & DIMPLE

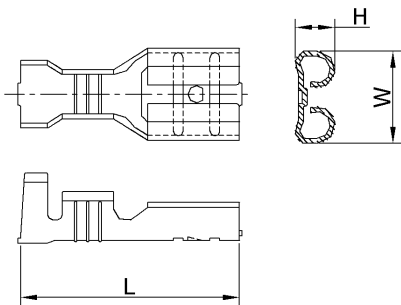

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1965	4.8 × 0.5	0.5 - 1.5	4.8 × 0.50 FEMALE	15.60	2.60	6.00	1883	BRASS	8,000
MG-1968	4.8 × 0.8	0.5 - 1.5	4.8 × 0.80 FEMALE	15.60	2.75	6.00	1910	BRASS	10,000
MG-1960	6.3 × 0.8	0.75 - 2.0	6.3 × 0.80 FEMALE	19.00	3.10	7.50	1969	BRASS	5,000

Snap - On Female with Windows & Dimple

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1961	6.3 × 0.8	0.5 - 1.25	6.3 × 0.80 FEMALE	18.70	3.10	7.50	1969	BRASS	6,000
MG-1955	4.8 × 0.5	0.5 - 1.5	4.8 × 0.50 FEMALE	15.60	2.55	6.00	1883	BRASS	8,000
MG-2960	6.3 × 0.8	0.75 - 2.0	6.3 × 0.80 FEMALE	19.00	3.10	7.50	1969	PHOS.BRO	5,000
MG-1011	6.3 × 0.8	2.0 - 4.0	6.3 × 0.80 FEMALE	18.70	3.15	7.50	1969	BRASS	4,000
MG-1954	6.3 × 0.8	0.5 1.25	6.3 × 0.80 FEMALE	18.70	3.10	7.50	1969	BRASS	1250(L)
MG-2961	6.3 × 0.8	0.5 - 1.25	6.3 × 0.80 FEMALE	18.70	3.10	7.50	1969	PHOS.BRO	6,000
MG-2011	6.3 × 0.8	2.0 - 4.0	6.3 × 0.80 FEMALE	18.70	3.15	7.50	1969	PHOS.BRO	4,000
MG-1812	6.3 × 0.8	0.5 - 1.0	6.3 × 0.80 FEMALE	15.00	3.20	7.50	1969	BRASS	1,250(L)
MG-1813	6.3 × 0.8	1.0 - 2.0	6.3 × 0.80 FEMALE	15.00	3.20	7.50	1969	BRASS	1,250(L)

Snap - On Female with Windows & Dimple

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1611	6.3 × 2.0	0.5 - 1.25	6.3 × 2.0 FEMALE	18.70	3.80	7.50	N.A	BRASS	6,000

*All dimensions are in mm