
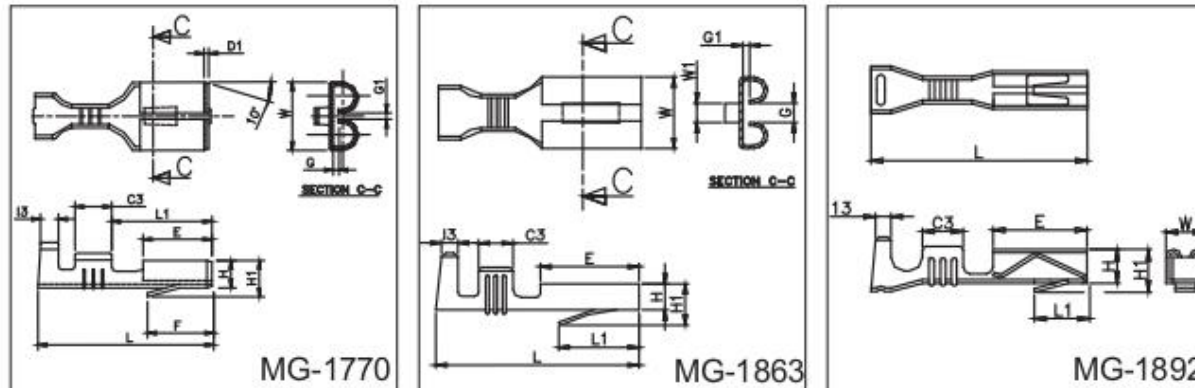


Snap - On Female Dimple with Lancing

Snap - On Female with Lancing (Terminal Lock)

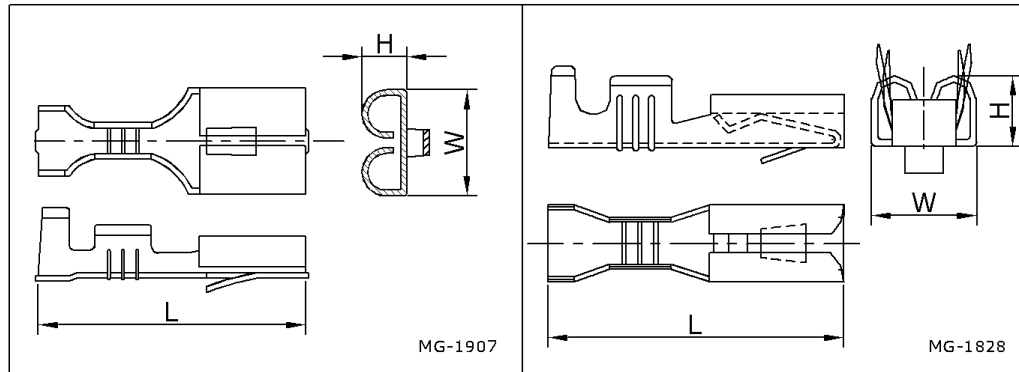

Technical Specification

Material: Brass

Surface: Nickel-plated to protect against corrosion

Minimum operating temperature: - 20 °C

Maximum operating temperature: 80 °C

Reference standard: Indian Standards

Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.

Snap - On Female Dimple with Lancing

	• Bur free connection surface. • Lowest millivolt drop for DC current application. • Simple and safe connection. • Terminate power cables in high-voltage applications. • Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done. • Flat contact surface to avoid hotspot.
--	---

SNAP - ON FEMALE DIMPLE WITH LANCING

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1850	2.8 × 0.5	0.5 - 1.0	FEMALE	15.50	1.9	3.70	N. A	BRASS	10,000