
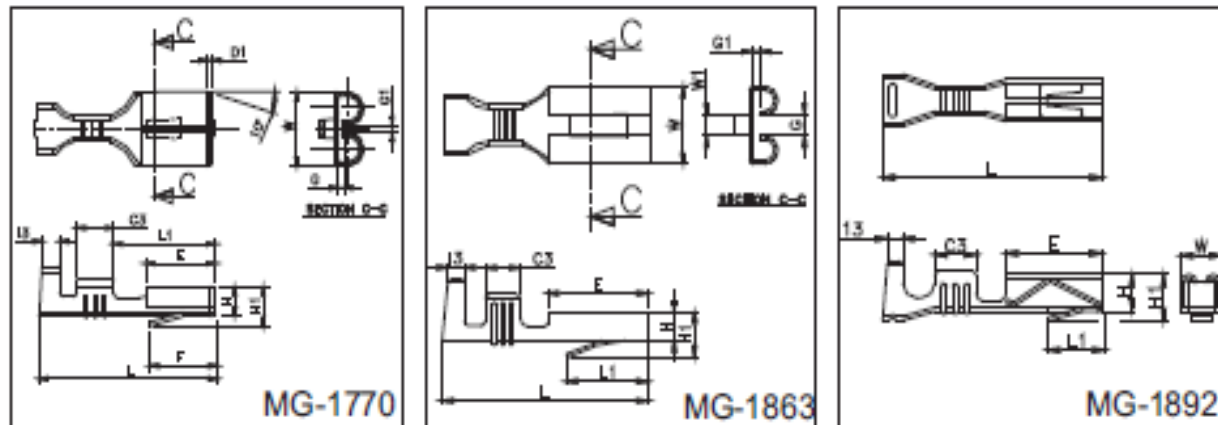


Snap - On Female with Lancin (Terminal Lock)

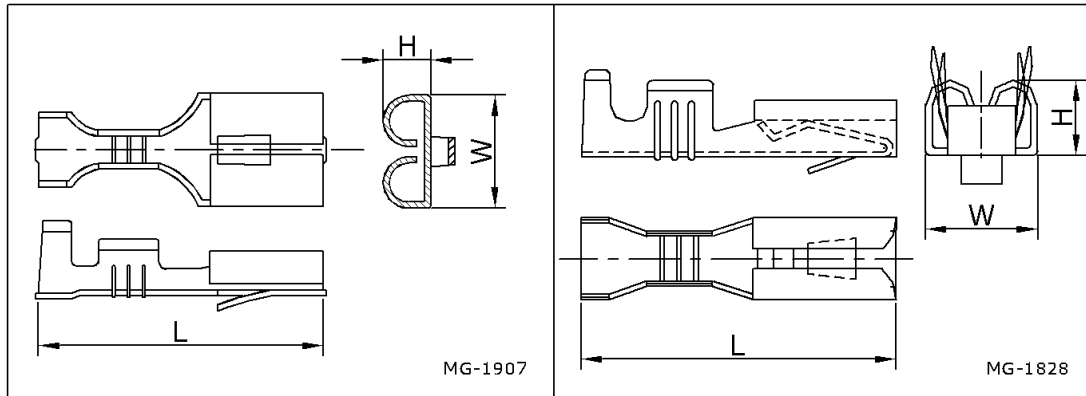

Technical Specification


- Material: Brass
- Surface: Nickel-plated to protect against corrosion
- Minimum operating temperature: -20 °C
- Maximum operating temperature: 80 °C
- Reference standard: Indian Standards
- Features
- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables

Snap - On Female with Lancin (Terminal Lock)

in high-voltage applications.

- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done.
- Flat contact surface to avoid hotspot.

SNAP - ON FEMALE WITH LANCING (TERMINAL LOCK)

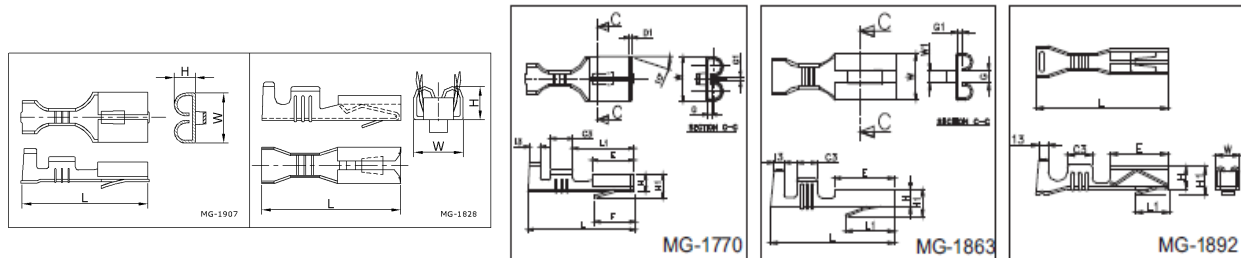

Snap - On Female with Lancin (Terminal Lock)

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1970	6.3 × 0.8	0.5 - 1.5	6.3 × 0.80 Female	18.70	2.95	7.50	1807	BRASS	5,000
MG-1828	2.8 × 0.5	0.5 - 1.0	2.8×0.50 Double Folded	15.50	2.70	4.10	1829	BRASS	4,000
MG-1770	6.3 × 0.8	0.5 - 1.0	6.3 × 0.80 Female	18.70	2.98	7.50	1807	BRASS	6,000
MG-1863	8.0 × 0.8	2.0 - 4.0	6.3 × 0.80 Female	24.50	3.40	8.90	1874	BRASS	2,000
MG-1892	2.3 × 0.5	0.5 - 1.0	2.3 × 0.50 Female	16.00	2.50	2.90	1478	BRASS	4,000

*All dimensions are in
mm