







Snap – On Female Angle Fasteners



Technical Specification

Material: Brass

Surface: Nickel-plated to protect against corrosion

Minimum operating temperature: -20 °C

Maximum operating temperature: 80 °C

Reference standard:
Indian Standards

Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron


Snap – On Female Angle Fasteners

plus to protect against corrosion.

- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done.
- Flat contact surface to avoid hotspot.

Snap – On Female Angle Fasteners

SNAP - ON FEMALE ANGLE FASTENERS

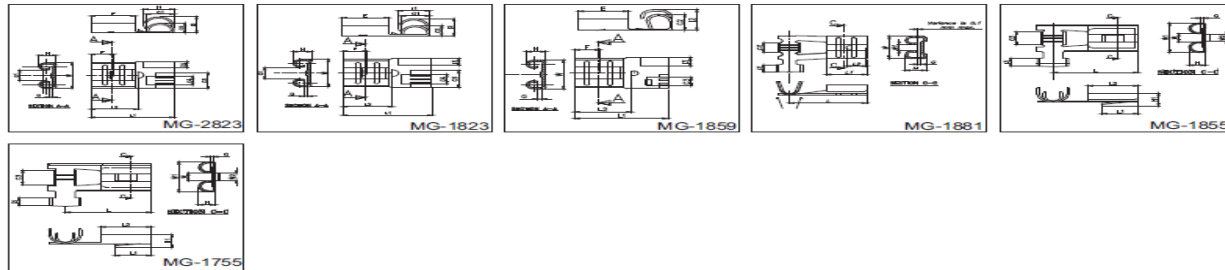

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLICABLE MATING TERMINAL	MATERIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-2823	6.3 × 0.8	1.0 - 2.5	6.3 × 0.80 Angle Fastener	15.00	3.00	8.15	1969	PHOS/BRO	1,250(L)
MG-1823	6.3 × 0.8	1.0 - 2.5	6.3 × 0.80 Angle Fastener	15.00	3.00	8.15	1969	BRASS	1,250(L)
MG-1859	4.8 × 0.5	0.5 - 1.0	4.8 × 0.50 Angle Fastener Close	11.50	2.35	6.00	1883	BRASS	5000

Snap – On Female Angle Fasteners

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1881	6.3 × 0.8	0.75 - 1.5	6.3 × 0.80 Female	16.20	3.35	7.50	1969	BRASS	3,000
MG-1855	8.0 × 0.8	0.75 - 2.5	8.0 × 0.80 Flasher	18.50	3.20	9.00	N.A.	BRASS	2,000
MG-1755	8.0 × 0.8	0.5 - 0.75	8.0 × 0.80 Flasher	17.50	3.20	9.00	N.A.	BRASS	2,000