


Male Plain

Male Plain

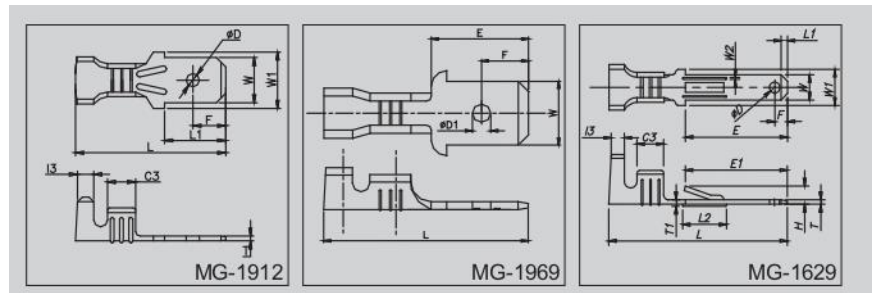

Technical Specification

Material: Brass

Surface: Nickel-plated to protect against corrosion

Minimum operating temperature: -20°C

Maximum operating temperature: 80°C

Reference standard: Indian Standards

Features

Annealed material optimizes material and crimping properties

ETP Electrolytic Grade Copper.

Tin-plated 5 micron plus to protect against corrosion.

Crack free crimping.


Bur free connection surface.

Lowest millivolt drop for DC current

Male Plain

	application. Simple and safe connection. Terminate power cables in high-voltage applications. Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done. Flat contact surface to avoid hotspot.
--	--

MALE PLAIN

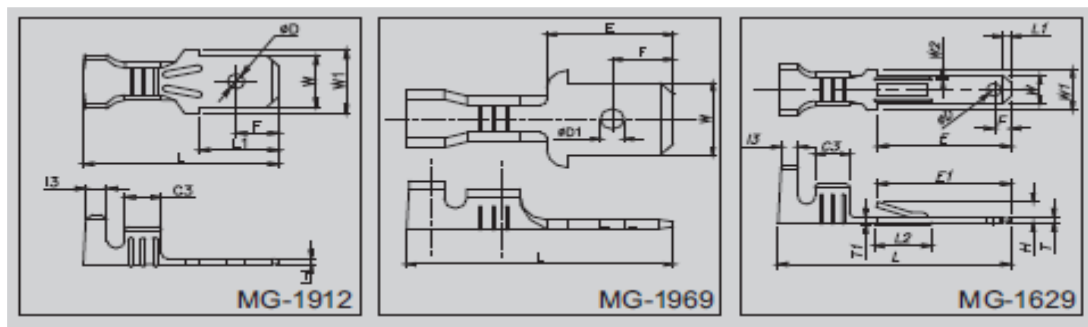

Male Plain

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLICABLE MATING TERMINAL	MATERIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1912	4.8 × 0.8	1.0 - 2.0	4.8 × 0.50 MALE	16.00	0.80	4.80	N.A.	BRASS	8,000
MG-1969	6.3 × 0.8	1.0 - 1.5	6.3 × 0.80 MALE	20.20	0.80	6.30	N.A.	BRASS	5,000
MG-1629	2.8 × 0.5	0.5 - 1.25	2.8 × 0.50 MALE	20.70	0.50	2.80	N.A.	BRASS	4,000

*All dimensions are in mm