


Ring & Fork - A

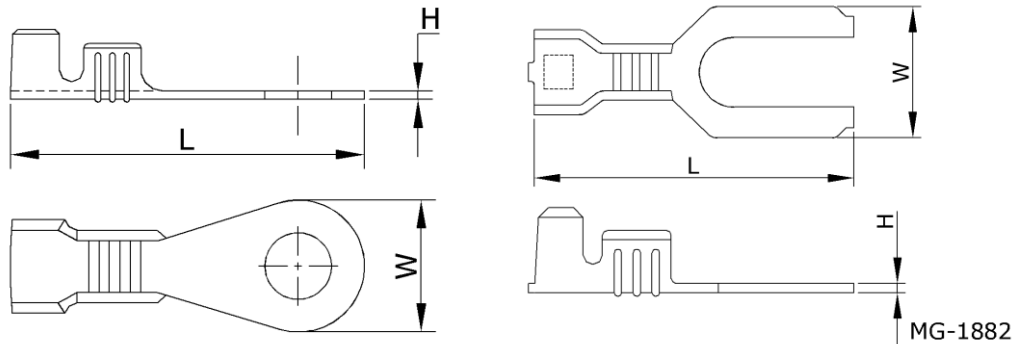

Technical Specification

Material: Brass

Surface: Nickel-plated to protect against corrosion

Minimum operating temperature: -20°C

Maximum operating temperature: 80°C

Reference standard: Indian Standards

Features

Annealed material optimizes material and crimping properties

ETP Electrolytic Grade Copper.

Tin-plated 5 micron plus to protect against corrosion.

Crack free crimping.


Bur free connection surface.

Lowest millivolt drop for DC current application.

Ring & Fork - A

	Simple and safe connection. Terminate power cables in high-voltage applications. Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done. Flat contact surface to avoid hotspot.
--	--

RING & FORK - A

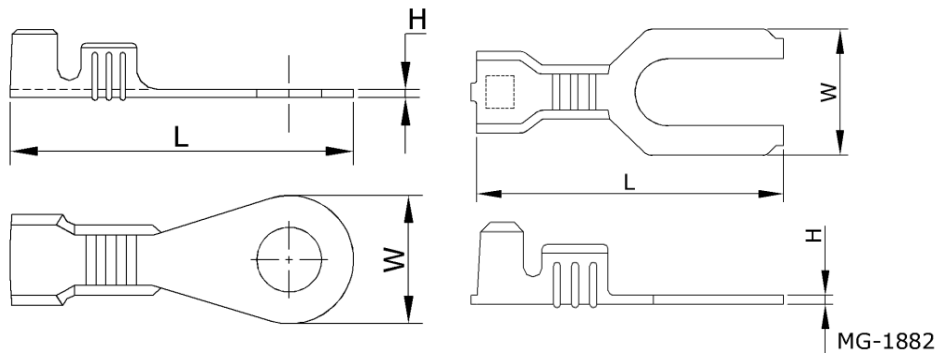

Ring & Fork - A

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1847	4.3	0.5 - 1.5	Ring Terminal 4.3 ID	17.0	0.5	6.6	NA	BRASS	8,000
MG-1822	5.4	0.75 - 1.5	Ring Terminal 5.4 ID	21.5	0.5	9.5	NA	BRASS	6,000
MG-1849	8.2	0.5 - 1.5	Ring Terminal 8.2 ID	24.0	0.6	12.0	NA	BRASS	4,000
MG-1841	4.2	0.5 - 1.5	Ring Terminal 4.2 ID	20.0	0.5	18.0	NA	BRASS	6,000
MG-1846	6.4	0.75 - 1.5	Ring Terminal 6.4 ID	24.0	0.5	12.0	NA	BRASS	4,000
MG-1746	6.4	0.5 - 1.0	1846 Small Conical	24.0	0.6	12.0	NA	BRASS	4,000
MG-1851	6.4	2.0 - 4.0	Ring Terminal 6.4 ID	26.5	0.6	12.0	NA	BRASS	2,000
MG-1882	NA	0.75 - 1.5	Fork Terminal Straight	16.8	0.5	7.0	NA	BRASS	4,000