

Ring & Fork - A & B



Technical Specification

Material: Brass

Surface: Nickel-plated to protect against corrosion




Minimum operating temperature: -20 °C

Maximum operating temperature: 80 °C

Reference standard:
Indian Standards

Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free

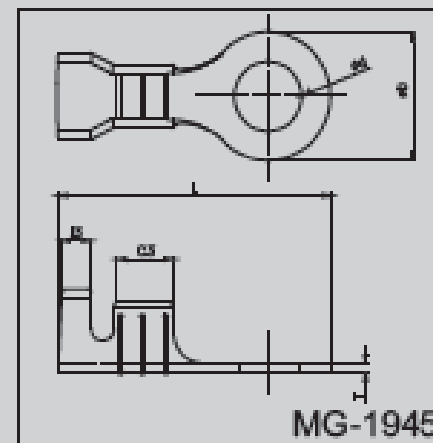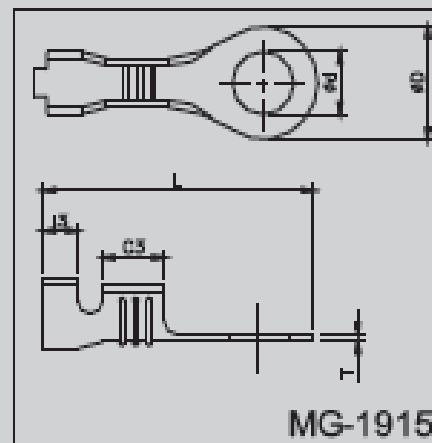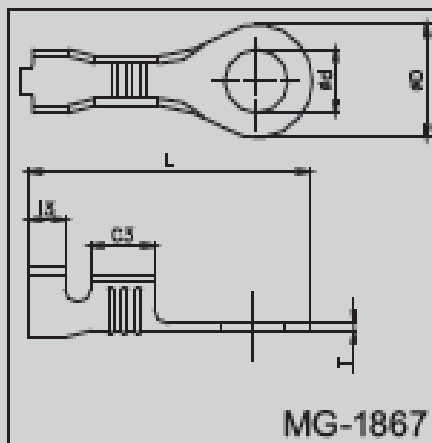


Ring & Fork - A & B

	crimping. • Bur free connection surface. • Lowest millivolt drop for DC current application. • Simple and safe connection. • Terminate power cables in high-voltage applications. • Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done. • Flat contact surface to avoid hotspot.
--	--

Ring & Fork - A & B

RING & FORK - A & B

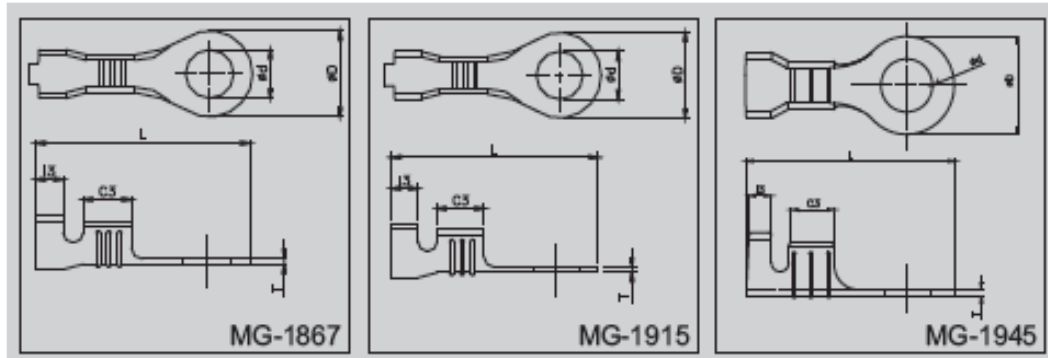

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1867	3.2	0.5 - 1.5	Ring Terminal 3.2 ID	17.1	0.5	6.6	NA	BRASS	8,000
MG-1915	2.4	0.5 - 1.5	Ring Terminal 2.4 ID	17.1	0.5	9.5	NA	BRASS	8,000
MG-1945	6.4	2.0 - 4.0	0.80 Thick	26.5	0.8	12.0	NA	BRASS	5,000

*All dimensions are in mm