






Bullet Female

Bullet Female



Technical Specification

Material: Brass

Surface: Tin-plated to protect against corrosion

Minimum operating temperature: -20 °C

Maximum operating temperature: 80 °C

Reference standard: Indian Standards

Features


- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against

Bullet Female

	corrosion. • Crack free crimping. • Bur free connection surface. • Lowest millivolt drop for DC current application. • Simple and safe connection. • Terminate power cables in high-voltage applications. • Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done. • Flat contact surface to avoid hotspot.
--	--

Bullet Female

BULLET FEMALE

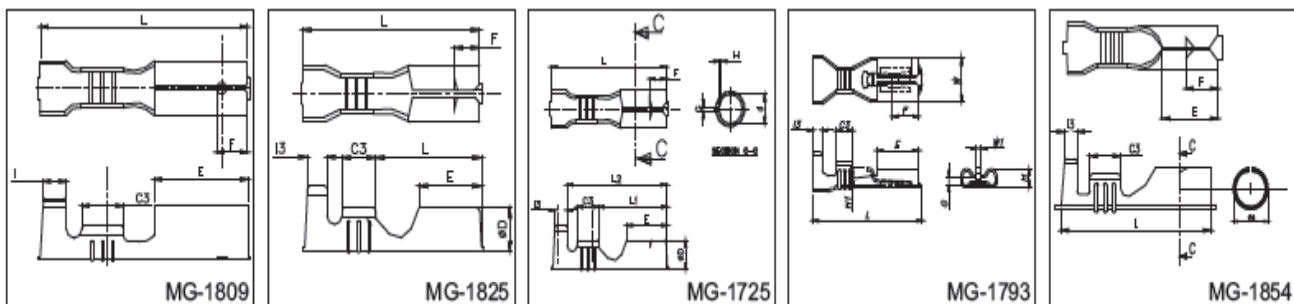

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLICABLE MATING TERMINAL	MATERIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1809	Φ 3.96	0.5 - 1.5	Bullet Female	20.00	4.50	4.50	1808	BRASS	7,000
MG-1825	Φ 3.96	0.75 - 2.0	Bullet Female (CB-104)	17.70	4.60	4.60	1808	BRASS	7,000
MG-1725	Φ 3.96	0.5 - 1.0	1825 Small Barrel	17.70	4.60	4.60	1808	BRASS	7,000
MG-1793	Φ 3.96	0.5 - 0.85	1893 Small Barrel	20.00	4.60	4.60	1808	BRASS	4,000
MG-1854	Φ 3.6	0.5 - 1.0	Bullet Female (CB-103)	17.50	4.10	4.10	1885	BRASS	8,000