


Splice & Mid - Joint

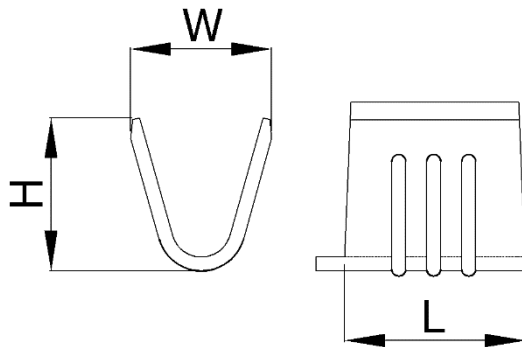

Technical Specification

Material: Brass

Surface: Nickel-plated to protect against corrosion

Minimum operating temperature: -20 °C

Maximum operating temperature: 80 °C

Reference standard: Indian Standards


Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-

Splice & Mid - Joint

	voltage applications. • Provided with inspection hole to ensure the conductor has been fully inserted before crimping is done. • Flat contact surface to avoid hotspot.
--	---

SPLICE & MID-JOINT



MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1835	N.A	0.5 - 1.0	CENTRE SPLICE	5.40	4.00	4.00	N.A	BRASS	10,000
MG-1876	N.A	1.5 - 3.0	CENTRE SPLICE	6.00	6.00	5.00	N.A	BRASS	5,000

Splice & Mid - Joint

MG CAT No.	TAB Size mm	Cable Size mm2	Description	L	H	W	APPLIC- ABLE MATING TERMINAL	MATE- RIAL	"STD PACKING QTY.(NOS) CHAIN"
MG-1900	N.A	1.5 - 2.5	CENTRE SPLICE	7.50	5.80	5.30	N.A	BRASS	8,000
MG-1938	N.A	0.5 - 0.75	CENTRE SPLICE	2.10	3.60	3.40	N.A	BRASS	25,000