


Copper Two Hole Extended Palm Terminal Ends (MGTT Series)

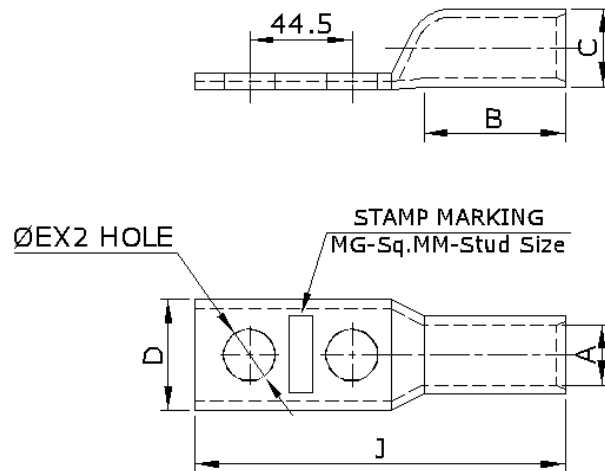

Technical Specification

Material: Copper BS 1977:1976 & IS 1897

Surface: Tin-plated to protect against corrosion

Minimum operating temperature: -50 °C

Maximum operating temperature: 150 °C

Reference standard: BS Standards

Features

- Annealed material optimizes material and crimping properties
- ETP Electrolytic Grade Copper.
- Tin-plated 5 micron plus to protect against corrosion.
- Crack free crimping.
- Bur free connection surface.
- Lowest millivolt drop for DC current application.
- Simple and safe connection.
- Terminate power cables in high-voltage applications.
- Provided with inspection hole to ensure the conductor has been fully inserted before crimping is

Copper Two Hole Extended Palm Terminal Ends (MGTT Series)


done.

- Flat contact surface to avoid hotspot.

COPPER TWO HOLE EXTENDED PALM TERMINALS

MATERIAL : COPPER BS 1977:1976 & IS 191:2007

SURFACE: TIN PLATED



Size mm ²	E	A	C	D	B	J	MG CAT NO.	Crim- ping Tools Code
16	10.5	5.5	7.9	16	16	100	MGTT-16-10	MG-50BS
25	10.5	7	9	15	16	100	MGTT-25-10	MG-50BS
35	10.5	8.2	10.6	16.5	16	100	MGTT-35-10	MG-50BS
50	10.5	9.5	12.4	18	25	109	MGTT-50-10	MG-50BS
50	13	9.5	12.4	18	25	109	MGTT-50-13	MG-50BS
70	10.5	11.4	14.7	21	30	114	MGTT-70-10	MG-70H
70	13	11.4	14.7	21	30	114	MGTT-70-13	MG-70H
95	10.5	13.5	17.4	25	30	116	MGTT-95-10	MG-120H
95	13	13.5	17.4	25	30	116	MGTT-95-13	MG-120H

Copper Two Hole Extended Palm Terminal Ends (MGTT Series)

Size mm ²	E	A	C	D	B	J	MG CAT NO.	Crim- ping Tools Code
120	13	15	19.4	28	35	122	MGTT-120-13	MG-120H
150	10.5	16.5	21.2	30	40	126	MGTT-150-10	MG-300H
150	13	16.5	21.2	30	40	126	MGTT-150-13	MG-300H
185	10.5	18.5	23.5	34	42	132	MGTT-185-10	MG-300H
185	13	18.5	23.5	34	42	132	MGTT-185-13	MG-300H
240	10.5	21	26.5	38	50	143	MGTT-240-10	MG-300H
240	13	21	26.5	38	50	143	MGTT-240-13	MG-300H
300	13.7	23.5	30	43	55	144	MGTT-300-13	MG-300H
400	13.7	28.5	36.5	52.5	60	149	MGTT-400-13	MG-1000
500	13.7	30	39	56	65	160	MGTT-500-13	MG-1000
630	13.7	35	45	65	65	160	MGTT-630-13	MG-1000

*All dimensions are in
mm