


COPPER PIN INSULATED TYPE TERMINAL

MATERIAL ETP COPPER IS : 1897:1983
SURFACE: TIN PLATED

1.5 sq. mm. **RED**
2.5 sq. mm. **BLUE**
4-6 sq. mm. **YELLOW**

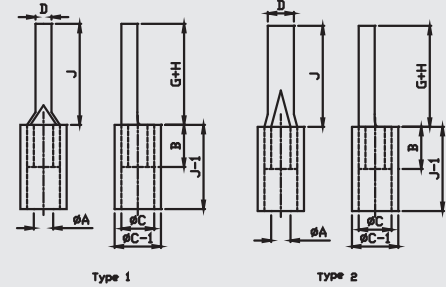

Size mm ²	A	C	D	E	F	B	G+H	J	C-1	J-1	TYPE	MG CAT NO.	Crimping Tools Code
1.5	1.6	3.2	1.9		0.8	5	10	17	4.8	10	I	MGPI-17	MG-10I
1.5	1.6	3.2	3.1		0.8	5	10	17	4.8	10	II	MGPI-40	MG-10I
2.5	2.3	3.9	1.9		0.8	5	10	17	5.5	10	I	MGPI-18	MG-10I
2.5	2.3	3.9	1.9		0.8	5	17	24	5.5	10	I	MGPI-18/A	MG-10I
2.5	2.3	3.9	3.1		0.8	5	10	17	5.5	10	II	MGPI-19	MG-10I
2.5	2.3	3.9	3.1		0.8	5	14.5	20	5.5	10	II	MGPI-19/A	MG-10I
4	2.9	4.9	2.7		1	6	10	20	7.1	14	I	MGPI-20	MG-10I
4	3.6	5.6	5.1		1	6	10	20	7.1	14	II	MGPI-21	MG-10I
6	3.6	5.6	2.7		1	6	10	20	7.1	14	I	MGPI-22	MG-10I
6	4	6	2.7		1	6	10	20	7.9	14	I	MGPI-23	MG-10I
10	4.5	6.7	4.3	2.4	1.1	8	12	22	7.9	14	III	MGPI-24	
16	5.8	8.2	5.5	2.6	1.2	10	13	26	10	16	III	MGPI-25	

*All dimensions in mm

WE CONNECT ENERGY

www.mgelectrica.com

F-41, MIDC Area, Satpur, Nasik-7, Maharashtra, India. Telfax: +91 253 2350961, 2350163 lugs@mgelectrica.com

For details about our other products and specifications please refer the corporate website

Disclaimer: M.G reserve the right product without prior, as part of its continual improvement programme. Whilst every effort is taken to ensure the accuracy of information contained in the sheet, M.G accepts no liability for matters arising as result of errors or omissions.